

ASAKUA AQUACULTURE & MARINE EQUIPMENTS
MOORING ACCESSORIES

OPEN LINK CHAINS DIN762


Size	Dimensions (mm)			Weight
mm	d	t	b	kg/m
16	10	50	36	1.8
19.5	13	65	46.8	3.1
22.4	16	80	57.6	4.7
26	18	90	65	6
30	20	100	72	7.4

OPEN LINK CHAINS DIN 764

13	13	45	47	3.5
16	16	56	58	5.2
18	18	63	65	6.5
20	20	70	72	8.2
23	23	80	83	11
26	26	91	94	14
28	28	98	101	16.5
30	30	105	108	19

OPEN LINK CHAINS DIN 766

13	13	36	47	3.9
16	16	45	58	5.8
18	18	50	60	7.3
20	20	56	67	9
23	23	64	77	12
26	26	73	87	15
28	28	78	94	17.5
30	30	84	101	20

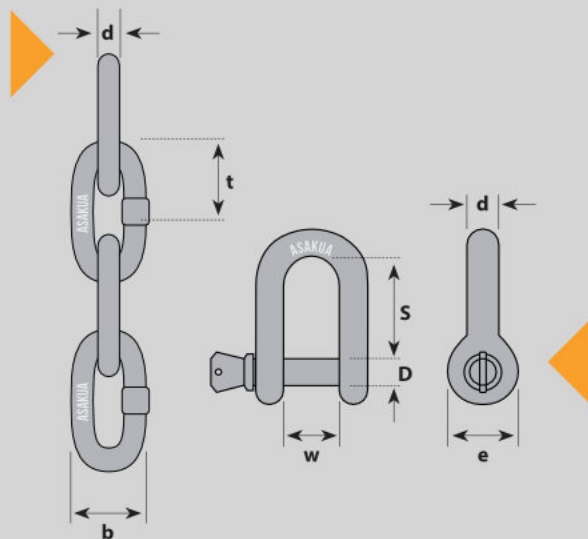


DEE TYPE WITH SCREW PIN

Diameter		Dimensions (mm)					Weight	WLL
mm	inch	d	e	s	D	w	kg/pcs	ton
16	5/8"	16	38	54	19	27	0.6	3.25
19.5	3/4"	19.5	44	63	22	31.5	1	4.75
22.4	7/8"	22.4	50	77	25	36.5	1.5	6.5
26	1"	26	56	90	28	43	2.3	8.5
30	1-1/8"	30	64	95	32	46.5	3.1	9.5
33	1-1/4"	33	70	106	35	51.5	4.4	12
37	1-3/8"	37	76	116	38	57	5.8	13.5
41	1-1/2"	41	84	130	42	60	7.7	17
48	1-3/4"	48	100	156	51	74	13.3	25
54	2"	54	122	171	60	83	19.8	35
70	2-1/2"	70	150	210	80	105	39.3	55


BOW TYPE WITH SCREW PIN

Diameter		Dimensions (mm)					Weight	WLL
mm	inch	d	e	s	D	w	kg/pcs	ton
16	5/8"	16	38	54	19	27	0.7	3.25
19.5	3/4"	19.5	44	63	22	31.5	1.1	4.75
22.4	7/8"	22.4	50	77	25	36.5	1.7	6.5
26	1"	26	56	90	28	43	2.5	8.5
30	1-1/8"	30	64	95	32	46.5	3.5	9.5
33	1-1/4"	33	70	106	35	51.5	4.8	12
37	1-3/8"	37	76	116	38	57	6.3	13.5
41	1-1/2"	41	84	130	42	60	8.3	17
48	1-3/4"	48	100	156	51	74	15.2	25
54	2"	54	122	171	60	83	21.5	35
70	2-1/2"	70	150	210	80	105	44.8	55

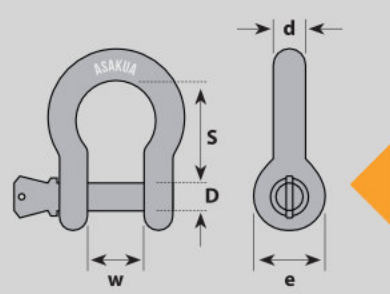


SWIVEL

Size	Dimensions (mm)			SWL	
mm	inch	A	B	C	ton
16	5/8"	17	44	39	2.5
19	3/4"	21	49	50	3.2
22	7/8"	25	53	57	5.4
26	1"	27	60	62.5	8
32	1-1/4"	35	67	79	11.5
35	1-3/8"	39	78	97	16
42	1-5/8"	44	95	123	22
50	2"	52	103	128	30

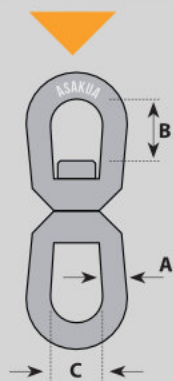

DEE TYPE WITH SAFETY PIN

Diameter		Dimensions (mm)					Weight	WLL
mm	inch	d	e	s	D	w	kg/pcs	ton
16	5/8"	16	38	54	19	27	0.7	3.25
19.5	3/4"	19.5	44	63	22	31.5	1.1	4.75
22.4	7/8"	22.4	50	77	25	36.5	1.7	6.5
26	1"	26	56	90	28	43	2.6	8.5
30	1-1/8"	30	64	95	32	46.5	3.5	9.5
33	1-1/4"	33	70	106	35	51.5	4.9	12
37	1-3/8"	37	76	116	38	57	6.4	13.5
41	1-1/2"	41	84	130	42	60	8.6	17
48	1-3/4"	48	100	156	51	74	14.9	25
54	2"	54	122	171	60	83	21	35
70	2-1/2"	70	150	210	80	105	40.5	55

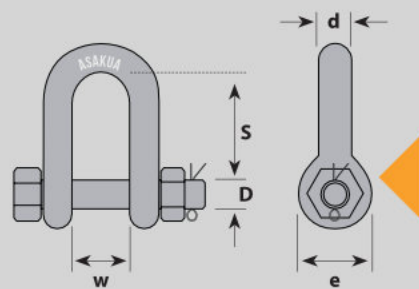

BOW TYPE WITH SAFETY PIN

Diameter		Dimensions (mm)					Weight	WLL
mm	inch	d	e	s	D	w	kg/pcs	ton
16	5/8"	16	38	54	19	27	0.8	3.25
19.5	3/4"	19.5	44	63	22	31.5	1.3	4.75
22.4	7/8"	22.4	50	77	25	36.5	1.8	6.5
26	1"	26	56	90	28	43	2.7	8.5
30	1-1/8"	30	64	95	32	46.5	3.9	9.5
33	1-1/4"	33	70	106	35	51.5	5.3	12
37	1-3/8"	37	76	116	38	57	6.8	13.5
41	1-1/2"	41	84	130	42	60	9.1	17
48	1-3/4"	48	100	156	51	74	16.3	25
54	2"	54	122	171	60	83	22.5	35
70	2-1/2"	70	150	210	80	105	45.9	55

